



New Telemecanique GV2-M10 (GV2M10) Starter Replacement - Data Sheet for US Breaker CHNT Brand Starters with the Trusted UL Certification!



GV-25-NS2

- ✓ Standards: UL508, CSA C22.2, IEC 60947-2, IEC60947-4-1, and CE
- ✓ Rated 600V UL & 690V IEC Covering Current Ranges From 0.16 to 25A
- ✓ 3P Hp Rated Manual Motor Starters Include a Manual Disconnect, CI-10 Ambient Compensated Overload Relay and Instantaneous Magnet Trip in One Compact Unit


Telemecanique GV2-M10 Contactor Replacement Cross Reference

| US Breaker- CHNT Part # | Telemecanique GV2 Starter Cross Reference | Description | Price |
|----------------------------|--|---------------------------------------|---------|
| GV 25 NS2 A6x3 | GV2-M10 | 4 - 6.3 Amp Starter - UL Listed CI-10 | \$31.99 |

GV-25-NS2 (GV2) Starter Dimensions (in.)

Starter Technical Data

| GV25NS2 Amps | | -A6x3 |
|--|----------|-----------|
| Adj. Amp Setting | - | 4 - 6.3 A |
| Maximum UL Hp Rating - 1Ph | 115V | 1/4 Hp |
| | 230V | 1/2 Hp |
| Maximum UL Hp Rating - 3Ph | 200V | 1 1/2 Hp |
| | 230V | 1 1/2 Hp |
| | 460V | 3 Hp |
| | 575V | 5 Hp |
| Short Circuit Icu (x1000 without fuses) | IEC-230V | 100 |
| | IEC-500V | 50 |
| | UL-600V | 5 |

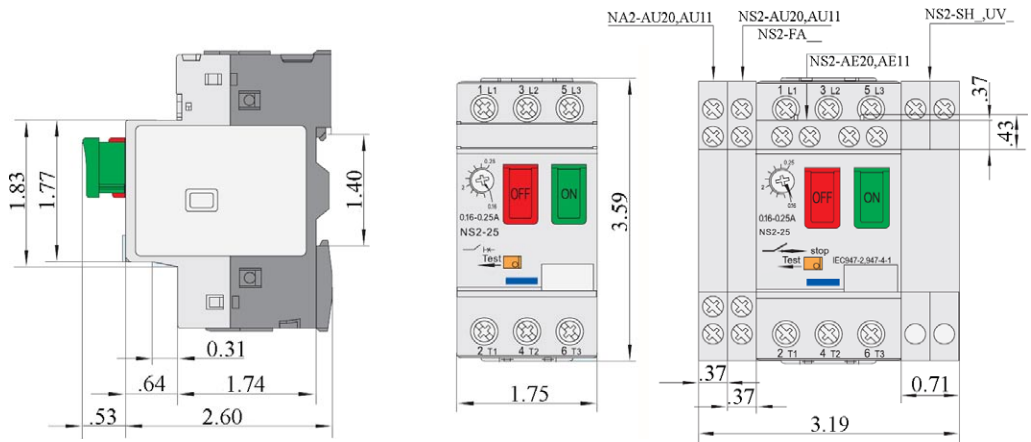

Accessories for GV-25-NS2 (GV2) Starters



GVNS2MC



GVNS2AE



GVNS2AU

| US Breaker- CHNT Part # | Telemecanique GV2 Cross Reference | Description | Price Each |
|----------------------------|--------------------------------------|---|---------------|
| GV NS2 AE11 | GV2-M01 | 1NO/1NC Top Mount Aux Cont (Ui=250V, Ith=2.5A, AC15=120VA) for all G25NS2 | \$5.70 |
| GV NS2 AE20 | GV2-AE20 | 2NO Top Mount Aux Cont (Ui=250V, Ith=2.5A, AC15=120VA) for all G25NS2 | \$5.70 |
| GV NS2 AU11 | GV2-AN11 | 1NO/1NC Side Mount Aux Cont (Ui=690V, Ith=6A, AC15=720VA) for all G25NS2 | \$8.00 |
| GV NS2 AU20 | GV2-AN20 | 2NO Side Mount Aux Cont (Ui=690V, Ith=6A, AC15=720VA) for all G25NS2 | \$8.00 |
| GV NS2 UV110 | GV2-AU116 | 2NS - 127Vac Under Voltage Trip 60hz for all G25NS2 | \$15.60 |
| GV NS2 SH110 | GV2-AS116 | 2NS - 127Vac Shunt Trip 60hz for all G25NS2 | \$15.60 |
| GV NS2 SH220 | GV2-AS226 | 2NS - 240Vac Shunt Trip 60hz for all G25NS2 | \$15.60 |
| GV NS2 FA1001 | GV2-AD1001 | 2NS 1NO Fault Signal Contact + 1NC Auxiliary Contact for all G25NS2 | \$9.38 |
| GV NS2 FA1010 | GV2-AD1010 | 2NS 1NO Fault Signal Contact + 1NO Auxiliary Contact for all G25NS2 | \$9.38 |
| GV NS2 FA0101 | GV2-AD0101 | 2NS 1NC Fault Signal Contact + 1NC Auxiliary Contact for all G25NS2 | \$9.38 |
| GV NS2 MC | GV2-MC02 | 2NS IP55 Waterproof Enclosure for all G25NS2 | \$17.95 |
| GV NS2 MC01 | - | 2NS IP55 Waterproof Enclosure with Emergency Stop Pushbutton for all G25NS2 | \$22.93 |

- Telemecanique part numbers are provided to assist in product selection. Proper engineering evaluation is required for each customer application.
- Series GV NS2 accessories are intended and UL listed for use with series GV NS2 starters.