



New Telemecanique LC1D65008 or LC1D40008 Contactor Replacement - Data Sheet for US Breaker Brand Contactors with the Trusted UL Certification!




NC1 D65 08

- ✓ Standards: UL508, CSA C22.2, IEC 60947, and CE Marked
- ✓ Integral DIN Rail & Base Mounting in One Compact Footprint
- ✓ Superior ISO Quality Proven by Multiple Global Standard Certifications

Telemecanique LC1D65008 & LC1D40008 Replacement Cross Reference

US Breaker- Brand Part #	Telemecanique Contactor Cross Ref		Control Coil Voltage	Main Contacts		Price Each
	Direct	Direct		NO	NC	
NC1 D65 08 - V24	LC1D65008 - B7	LC1D40008 - B7	24V B7	2	2	\$95.16
NC1 D65 08 - V120	LC1D65008 - G6	LC1D40008 - G6	120V G6	2	2	\$95.16
NC1 D65 08 - V240	LC1D65008 - U6	LC1D40008 - U6	240V U6	2	2	\$95.16

NC1 D65 Contactor Technical Data




NC1D Type	NC1-D65	
Thermal Current I _{th} (AC-1 IEC) Amps	660V	80
Inductive Current (AC-3 IEC) Amps	240V	25
	460V	40
	600V	40
UL Power Rating 3 Phase (Hp)	120V	5
	240V	15
IEC Power Rating (KW)	380/400V	30
	Elect.	800,000
Operations (AC-3)	Mech.	8,000,000

NC1 D65 Contactor Coil Data

NC1D Type		NC1-D65
Coil Power	Start-up (VA)	200
	Holding (VA)	20
Operation Range of Rated Voltage	Pick-up Voltage	85% - 100%
	Drop-out Voltage	20% - 75%

NC1 D65 Contactor Dimensions (in.)

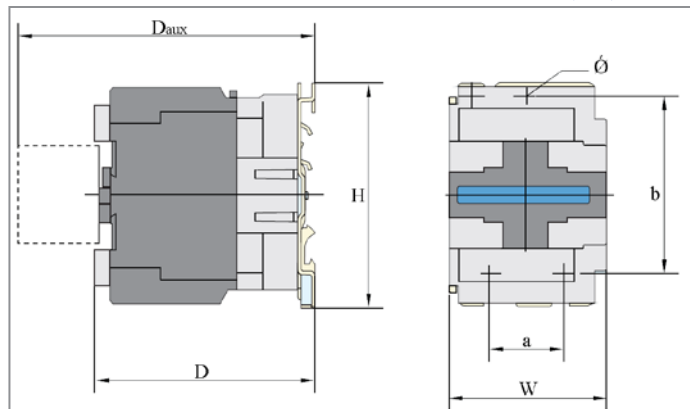

NC1D Dim (in)	H	W	D	Daux	a	b	Ø
NC1 D6504 & D6508	5.1	3.3	4.6	6.1	1.6	3.9	0.26

Accessories for NC1 D95 Contactors



NC1F411



NC1F422



NCF111C



NCSR2A



NC1F5



NC1MI4065a

Auxiliary Contacts

US Breaker- Part #	Telemecanique Cross Ref
NC F4 20	LA1DN 20
NC F4 11	LA1DN 11
NC F4 02	LA1DN 02
NC F4 40	LA1DN 40
NC F4 31	LA1DN 31
NC F4 08	LA1DN 08
NC F4 22	LA1DN 22
NCF1 11C	LA8DN 11

Time Delay Blocks

US Breaker- Part #	Telemecanique Cross Ref
NC F5 T2	LA2DT2
NC F5 D2	LA3DR2

Mechanical Interlocks

US Breaker- Part #	Telemecanique Cross Ref
NC MI 80 95a	LA9D80978

- Telemecanique part numbers are provided to assist in product selection. Proper engineering evaluation is required for each customer application.
- NC accessories are intended and UL listed for use with their associated NC1D & series F NC2 contactors